

BIO 2-400

Reversing Drum Concrete Mixer

BIO 2-400 Standard Equipment

- ✓ Three-phase 400V/50Hz motor
- ✓ Cylinder with hopper fall prevention safety system
- ✓ Pneumatic wheels
- ✓ Water tank with level indicator
- ✓ Side protection guards

Optional Accessories

- ✓ Scraping shovel with 20 m coiler unit and clutch

Applications

BIO 2-400 is designed for big building sites. The scraping shovel loading system allows to get a concrete hour production up to 8 m³/h.


400V/60Hz TPH

MOTOR AVAILABLE

✓ **Bio 2-400**

Separate loading of water and aggregates

The materials are admitted to the drum separately; this feature improves the quality of the batch, making it more homogeneous and well blended.

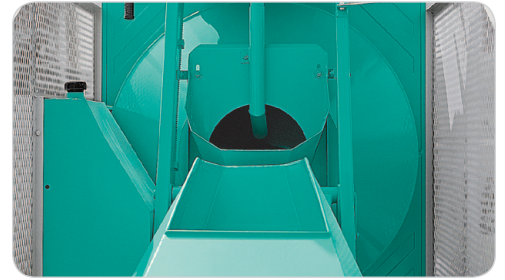

Bio 2-400

Drum capacity	l	400
Mix capacity	l	320
Water tank capacity	l	45
Concrete hour production	m ³ /h	8
Overall dims. raised LxWxH	mm	1860/2350/2800
Machine weight	kg	930
Motor power rate 400V/50Hz	kW	3
Absorbed curr.	Amp	7.7
Pneumatic wheels		2

Scraping Shovel

Motor rating 400V50Hz	kW	1.5
Absorbed current	Amps	4
Traction speed	m/sec	0.5
Traction capacity	kg	400
Drum rpm	n/min	63
Steel cable	m	20