

BOOSTER 15

2-cylinder piston pump, hydraulic driven

APPLICATIONS

For pumping concrete and self levelling floor screeds and for shotcreting.



Booster 15
Cod. 1106120



Booster 15 R
(towable version)
Cod. 1106121



**Compact dimensions,
easy on-site transport
and better handling**



**Well-soundproofed
engine compartment**



**Pump with exclusive SOFT
SPRITZ system to ensure
high pumping performance
also at low flow rates**



CONTROL PANEL



**ANTISHOCK control panel with
electromechanical controls**

Standard Equipment

- ✓ Liquid cooled Diesel engine - 21.2 kW
- ✓ Concrete hopper with agitator
- ✓ Grid with 12V vibrator
- ✓ Hydraulic system with reversing
- ✓ Pumping unit with S-tilting valve for automatic compensation of clearance and wear
- ✓ 4" Victaulic delivery manifold (Ø 100 mm)
- ✓ Control panel with electromechanical controls
- ✓ Four-function remote control via cable
- ✓ Pumping piston replacement kit
- ✓ Drawbar for non-towable version
- ✓ Road-towable drawbar, parking brake and light units (road-towable version)
- ✓ Accessory box
- ✓ Grease pump



✓ Openable and tiltable taper hopper for simplified cleaning operations and easy maintenance

✓ 2-cylinder piston pump, hydraulic driven




Supply	-	Diesel engine
Installed power rate	kW	21,2
Pumping system	-	Two-cylinder with hydraulic control
Max grain size	mm	25
Flow rate (*)	m ³ /h	2-15
Pumping pressure (*)	bar	70
Pipe outlet	-	Victaulic 4"
Hopper capacity	l	240
Loading height	mm	1080
Dimensions width/length/h (towable version)	mm	1495/4100/1540
Weight	kg	1550

*NOTE The max flow rate and the max pumping pressure cannot be performed at the same time.

BOOSTER 15

2-cylinder piston pump, hydraulic driven

COOLING SYSTEM

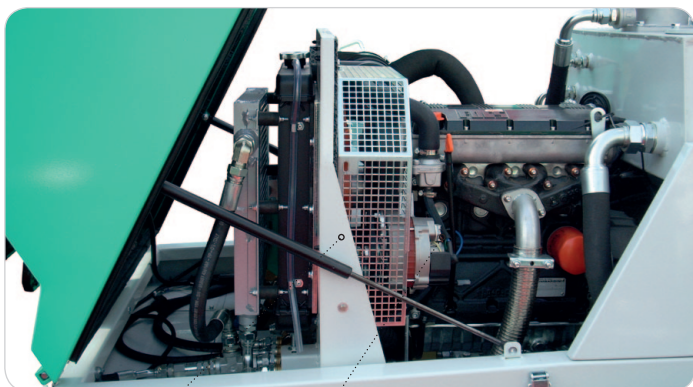

- ✓ **COOL FAST**
larger-sized cooling system for use in extreme conditions
- ✓ Pump with exclusive SOFT SPRITZ system to ensure high pumping performance also at low flow rates
- ✓ Engines that meet the latest anti-pollution regulations. Well-soundproofed engine compartment

HOPPER



- ✓ S-tilting valve with self-seal effect. Automatic compensation for wear by the self-adjusting ring on the S-pipe.
- ✓ Two-way hopper mixer

REMOTE CONTROL

- ✓ Five-function remote control via cable (Standard)
 - Start
 - Stop
 - Reversal
 - Flow increase
 - Flow decrease



- ✓ Cod. 1107001
Five-function radio remote control unit with output adjustment (Optional)
 - Start
 - Stop
 - Reversal
 - Flow increase
 - Flow decrease



Booster 15 R (road-towable version)