

# PRESTIGE

Single-phase plaster sprayer for dry premixed materials

## APPLICATIONS

For mixing and spraying plastering mortars in bags or from silo: premixed materials, gypsum base premixed materials, insulating plasters, lightened materials, self-levelling screeds.



✓ Safety sensor for stopping the paddles if the grid is opened

✓ Variable displacement pump for low oil heating and higher efficiency of the hydraulic circuit.

↓ **PRESTIGE Eco T Power**  
15 kW  
Cod. 1106130



✓ The high capacity mixer (180 l) with DUST CONTROL design paddles reduce dust emission while mixing



## Standard Equipment

- ✓ Diesel engine 15 kW
- ✓ 400 l/min. compressor
- ✓ 2L6 screw pump
- ✓ 10+20 m material hose Ø 35 mm
- ✓ 5 m material hose Ø 25 mm
- ✓ 2 washing sponges
- ✓ 16+20 m air hose Ø 13 mm
- ✓ 1 hose holder fitting
- ✓ Tilttable mixer
- ✓ Hydraulic variable displacement pump
- ✓ Road towing kit (only in countries where it is allowed)
- ✓ Metal accessory box

## Innovative System **ECO TPOWER**

It adjusts revolution number according to working phase

- Low Consumptions
- Low Emissions
- Grater working autonomy



✓ High capacity hopper (200 l)



### ELECTRONIC WATER METER




Cod. 1107209

AQUA CONTROL electronic water meter: for easy and quick adjusting of water quantity to be put into the mixer at every mixing cycle.

Optional

### MOTORE DIESEL

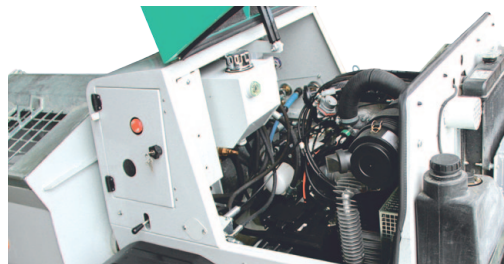

3-cylinder, liquid-cooled diesel engine that meets the latest anti-pollution regulations and reduces noise. 2400 rpm operating speed for less wear and low fuel consumption.

### JET CLEANER



Cod. 1107208

High pressure jet cleaner 140 bar

Optional

### CONTROL PANEL



ANTI SHOCK control panel with electromechanical controls (Standard hour meter)

Recommended accessories for

### Traditional & premixed mortar

- ✓ 1107036 - Vibrating grid
- ✓ 1107149 - Pumping Unit IM 25
- ✓ 1107577 - Spray gun for traditional & premixed mortar
- ✓ 1107560 - 5-piece kit Ø 16 mm

### Self-levelling floor screeds

- ✓ 1107090 Pumping Unit 60.12 for self-levelling floor screeds

Motor power rate ISO 3046/1-IFN	kW	15 (at 2400 rpm)
Compressor flow rate	l/min	400
Max pumpable grain size	mm	4-6 (2L6)
Variable theoretic flow rate	l/min	0-60 (2L6)
Max pressure	bar	40 (2L6)
Hopper capacity	l	200
Mixer capacity	l	180
Dimensions width/length/h (mixer tilted)	mm	1360/3340/1340
Weight	kg	750
Sound pressure level	dB (A)	< 78

(\*) The road towing is valid only in the countries where it is allowed.