

MOVER 270d

Pneumatic conveyor for conventional floor screed with double air flow rates and automatic pumping cycle

APPLICATIONS

For conveying conventional floor screed



Innovative **ECO AIR** System

Selectable air flow:

- 4500 l/min - Super silenced
- Reduced consumption
- 5200 l/min - Super performance



MOVER 270d Diesel engine
Cod. 1106025



MOVER 270dr Diesel engine
Towable
Cod. 1106019



MOVER 270db Diesel engine
With loading bucket
Cod. 1106026



MOVER 270dbr Diesel engine
• Towable
• With loading bucket
Cod. 1106020



Higher slope (up to 65°) for the charging bucket.
A descent control device can also be operated when
the machine is cold (Mover 270db, Mover 270dbr)



Motor bonnet
with very high
sound absorption




DIESEL ENGINE



Kubota Diesel engine – 48.5 kW
Low speed engine setting (2400-2800 rpm) for
lower noise, consumption and maintenance

Standard Equipment

- ✓ Built-in compressor with direct drive
- ✓ Certified pressure tank 270 l
- ✓ 195R14 tyres
- ✓ Non road-towable drawbar (Mover 270d / 270db)
- ✓ Road-towable drawbar, parking brake and light units (Mover 270dr/270dbr)
- ✓ Loading bucket (Mover 270 db / dbr)
- ✓ 20+10+10 m material hose Ø 60 mm with cam couplings
- ✓ Tripod stand with Ø 60 mm coupling
- ✓ 2 hose holder fittings
- ✓ Material outlet manifold Ø 60 mm
- ✓ Built-in hydraulic power system
- ✓ Manual grease pump
- ✓ Accessory box, manual grease pump and cleaning accessories

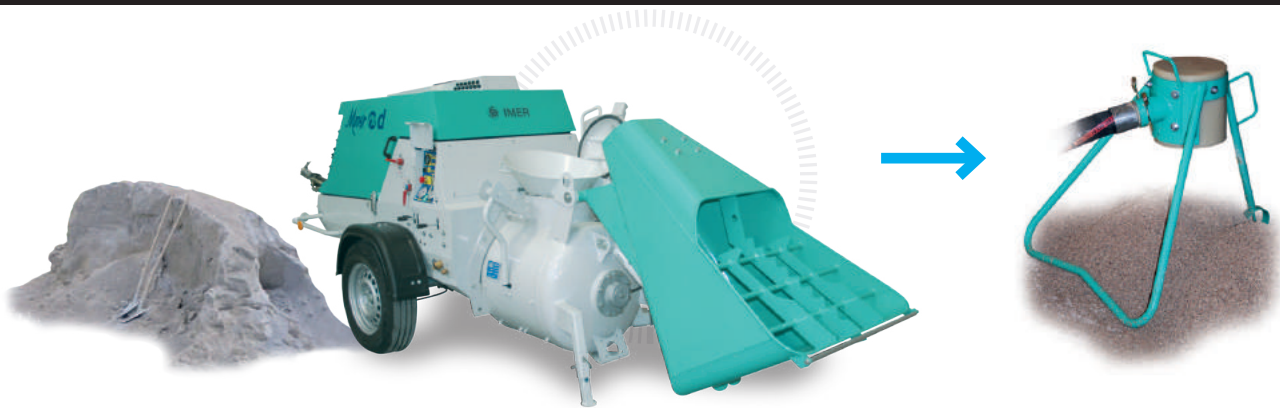

✓ ANTISHOCK control panel



✓ Hatch with built-in safety valve for easy and safe handling



✓ Road-towable drawbar with lights (road-towable version "R")

Cable and rope coilers with scraping shovel (Optional)
Cod. 1107055 (Mover 190db)



		Mover 270d	Mover 270db	Mover 270dr	Mover 270dbr
Motor power rate	kW	48,5	48,5	48,5	48,5
Compressor flow rate	l/min	4500-5200	4500-5200	4500-5200	4500-5200
Compressor max. pressure	bar	7	7	7	7
Max. transportable grain size	mm	10/15	10/15	10/15	10/15
Average cycle output	l	200	200	200	200
Tank capacity	l	270	270	270	270
Loading height	mm	950	435	950	435
Dimensions width/length/h	mm	1490/4500/1560	1490/4500/2420 with bucket raised	1490/4500/1560	1490/4500/2420 with bucket raised
Weight	kg	1530	1660	1670	1800
Sound pressure level	dB (A)	< 83	< 83	< 83	< 83
Loading bucket	-	no	yes	no	yes
Road towing kit	-	no	no	yes	yes



↑ **MOVER 270d** Diesel engine
Cod. 1106025



↑ **MOVER 270dr** Diesel engine
Towable
Cod. 1106019



↑ **MOVER 270db** Diesel engine
With loading bucket
Cod. 1106026



↑ **MOVER 270dbr** Diesel engine
• Towable
• With loading bucket
Cod. 1106020

MOVER WT (without hoses) are equipped with:
discharge stand, material hose hanging system, gaskets, output manifold and accessories box
for hose cleaning. (for details on WT versions see the price list)